



XD-125

Commercial Dehumidifier



Attach with ASK125
for APDS-1 System



The XPOWER XD-125 Commercial Dehumidifier is designed to maximize water extraction while combining the highest efficiency in performance and portability. A highly durable housing construction can withstand rough handling, while its semi-pneumatic wheels allow for easy transport and maneuverability on the job site. With the XD-125's unique and complete operating features, it is the perfect machine for not only water damage restoration jobs, but also for multiple industrial applications where maximum performance in air drying is a necessity.


Model	XD-125
Water Removal Capacity	76 Pints/ Day at AHAM (80°, 60% RH) 125 Pints/ Day (90°F, 90% RH)
Type	Standard Refrigerant (R410A)
Volts/Cycle	115V/60Hz
Motor	1HP
AMP	7.3 A
Rated Airflow	235 CFM
Speeds	1 Speed
Operating Range	33° - 100° F (1° - 38°)
Filter	High Airflow Filter (HAF)
Water Pump Out	Centrifugal
Drain Hose Length	20 ft.
Compressor Type	High Efficient Rotary Compressor
Unit Weight	81 lbs.
Unit Dimensions	20" x 19" x 32"
Box Weight	90 lbs.
Box Dimensions	22" x 21" x 34"
Cord Length	25 ft.
Housing	Roto Mold Polyethylene
Safety Certification	ETL/CETL



XPOWER MANUFACTURE, INC. • 240 CLARY AVENUE, SAN GABRIEL, CA 91776 • www.XPOWER.com
PHONE: (626) 285-3301 • FAX: (626) 285-3302 • EMAIL: info@XPOWER.com

DON'T JUST DRY IT, PURIFY IT!

Indoor air moving, purifying and drying system Working Schematic Diagram

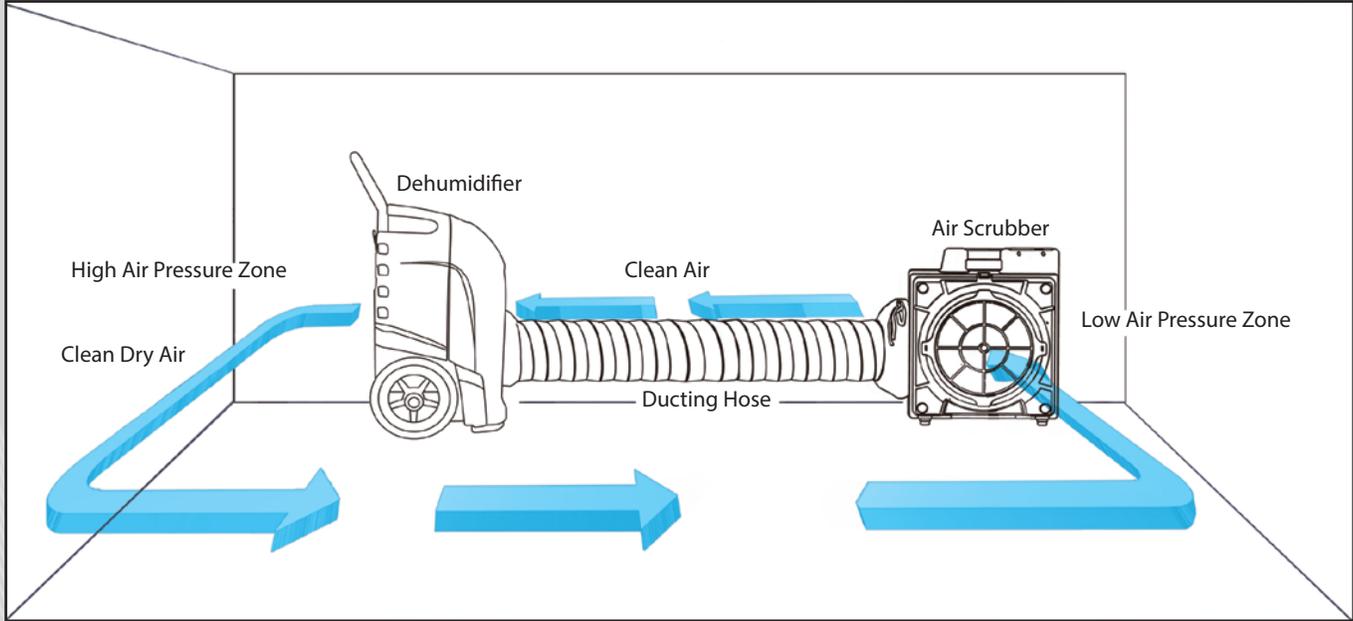

XPOWER's XD-125 is part of a revolutionary new Air Purification & Drying System which uses the combined power of the Air Scrubber and Dehumidifier to remove moisture and contaminants from the air!

Model	X-3500
Volts/Cycle	115 Volt/ 60 Hertz
Motor	1/2 HP
Max AMP	2.8 A
Rated Airflow	600 CFM
Speeds	Variable Speed Control
RPM (Low-High)	1000 - 2,900 RPM
Unit Weight	32.8 lbs.
Unit Dimensions	19.6" x 12.3" x21.6"
Cord Length	13 ft. / 18AWG
Housing	ABS
Filter System	4 Stage
Stackable	Yes
Safety Certification	ETL/CETL

